
Technical Sheet

Urinal concealed pre-installation



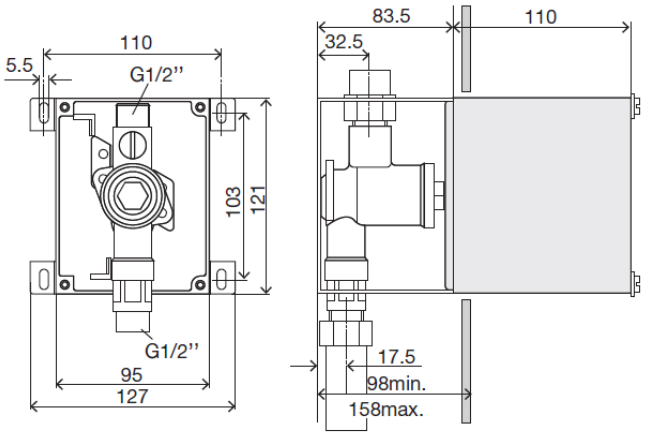

Product Identification

883087

- Urinal concealed pre-installation

Definition and Application

- Concealed pre-installation for urinal plate, available for all kind of walls

Technical Features

- Operating pressure: 0,8-5 bar;
- Flow rate: ca.0,3l/s
- Connection: G1/2
- Dimensions: 121 X 127 X 83.5 mm
- Required pre-installation

Accessories:

- 2 screws for assembling
- 2 G1/2 water connections
- 1 EPS box protection

Compatiblity

- Frames Urinal Sanitarblock and Eco Urinal

Millimetres measures

www.oli-world.com
comercial@oli-world.com
export@oli-world.com

Warranty

- Consult the warranty terms in the general selling terms: https://www.oli-world.com/en/general-sales-conditions/.

  If the product is not correctly installed the warranty is not valid

Observations

- The concealed pre-installation has to be installed before closing the wall
- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site www.oli-world.com

Millimetres measures

www.oli-world.com
comercial@oli-world.com
export@oli-world.com